



## Touch Cube

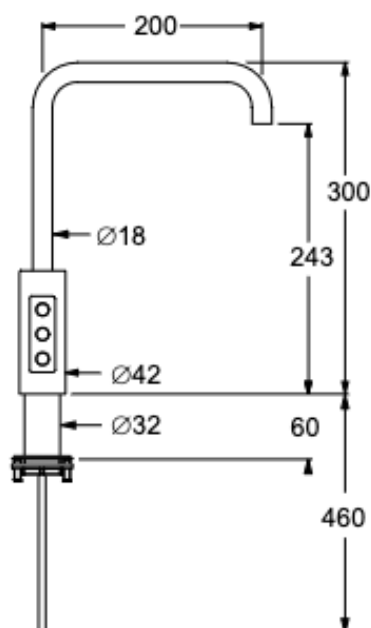

### Kleppenset



### CERTIFICATION



D.M. 174



## STANDARD 10l/h COOLER

|                       |                         |
|-----------------------|-------------------------|
| Cooling capacity *    | 10 l/h                  |
| Delta temperature *   | 10 °C                   |
| Max continuous supply | 5 l                     |
| Pump                  | Membrane 24V DC         |
| Cooling technology    | Ermetic saturator 2,2 l |
| Condensation          | Static                  |
| Refrigerant gas       | R134a / R1234 xy **     |
| Inlet Pressure        | 3 bars                  |
| Adjustable thermostat | Yes                     |
| Supply                | 220W 50-60hz            |
| Compressor power      | 1/12 CC <sup>2</sup>    |
| Absorbed power        | 145 W                   |

|                                                  |                                                                   |
|--------------------------------------------------|-------------------------------------------------------------------|
| Working room temperature                         | Min 5°C - Max 35°C                                                |
| Inlet water pipe                                 | 8 mm                                                              |
| Inlet CO <sub>2</sub> pipe                       | 6 mm                                                              |
| Dispensing area height                           | 303 mm                                                            |
| Typology                                         | Countertop / Undercounter                                         |
| Drip tray                                        | Stainless steel                                                   |
| Net weight                                       | 12 kg                                                             |
| Dimensions WxDxH<br>May vary depending on models | 190 x 339 x 422 mm                                                |
| Dispensing options                               | Cold still water, cold sparkling water and room temperature water |
| Materials                                        | Hot painted metal sheet                                           |

\*inlet water temp of 20°C; Delta is the difference temperature between inlet and outlet water

\*\* optional

## OPTIONAL 20l/h COOLER

|                       |                         |
|-----------------------|-------------------------|
| Cooling capacity *    | 20 l/h                  |
| Delta temperature *   | 10° C                   |
| Max continuous supply | 7 l                     |
| Pump                  | 65w                     |
| Cooling technology    | Hermetic saturator 5.5l |
| Condensation          | Slow ventilation        |
| Refrigerant gas       | R1234 xy / R134a        |
| Inlet Pressure        | 3 bars                  |
| Adjustable thermostat | Yes                     |
| Supply                | 220w 50-60 Hz           |
| Compressor power      | 1/12 CC <sup>2</sup>    |
| Absorbed power        | 145W                    |

|                                                  |                                                                   |
|--------------------------------------------------|-------------------------------------------------------------------|
| Working room temperature                         | Min 5°C - Max 35°C                                                |
| Inlet water pipe                                 | 8 mm                                                              |
| Inlet CO <sub>2</sub> pipe                       | 6 mm                                                              |
| Dispensing area height                           | 303 mm                                                            |
| Typology                                         | Countertop / Undercounter                                         |
| Drip tray                                        | Stainless steel                                                   |
| Net weight                                       | 16 kg                                                             |
| Dimensions WxDxH<br>May vary depending on models | 250 x 490 x 422 mm                                                |
| Dispensing options                               | Cold still water, cold sparkling water and room temperature water |
| Materials                                        | Hot painted metal sheet                                           |

\*inlet water temp of 20°C; Delta is the difference temperature between inlet and outlet water

|                                                                             |                             |
|-----------------------------------------------------------------------------|-----------------------------|
| <b>Dimensions (W x D x H) or (Dia x H)</b>                                  |                             |
| CO2 Cartridge (2kg, 1,3kg or 0,6kg)                                         | Max 115 x 440 mm            |
| Filter (0,2 micron)                                                         | 80 x 260 mm                 |
| Filter housing                                                              | 90 x 85 mm                  |
| <b>COLOURS</b>                                                              |                             |
| Faucet                                                                      | See website                 |
| Cooler                                                                      | White                       |
| <b>REQUIREMENTS</b>                                                         |                             |
| Electric (Cooler & Faucet)                                                  | 2 x 230V / 16A              |
| Water                                                                       | 3/4" male cold water outlet |
| Undercounter room for <b>standard 10l</b> cooler & CO2 & filter (W x D x H) | Min 380 x 450 x 520 mm      |
| Undercounter room for <b>optional 20l</b> cooler & CO2 & filter (W x D x H) | Min 420 x 550 x 520 mm      |
| Advised natural ventilation                                                 | 200 cm <sup>2</sup>         |
| Holes to be provided (Dia)                                                  | 1x 35 mm                    |